


GDR Monitored glass door release

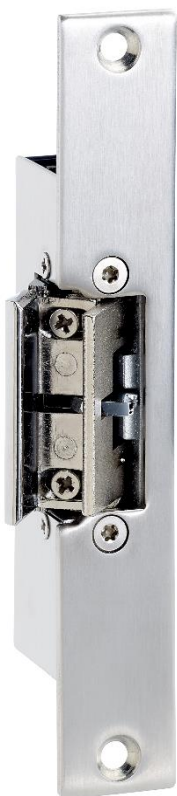

The GDR fail-safe glass door release is ideal for plate glass doors with a timber or metal frame. Suitable for inward or outward opening doors, glass thickness 10-12mm.

Features

- Fail safe (=power to lock)
- Suitable for inward or outward opening doors
- Adjustable jaw
- Stainless steel faceplate
- Door position monitoring
- Mortice fix

Technical Information

- Voltage: 12Vdc
- Current draw: 200mA
- Dimensions: 160mm(L) x 25mm(W) x 41mm(D)
- Monitoring contacts: COM/NO/NC

Related Products

EB300VGL



PSU3A-12(B)



DG500



DG35

